ASSEMBLY INSTRUCTION FOR 29220/2

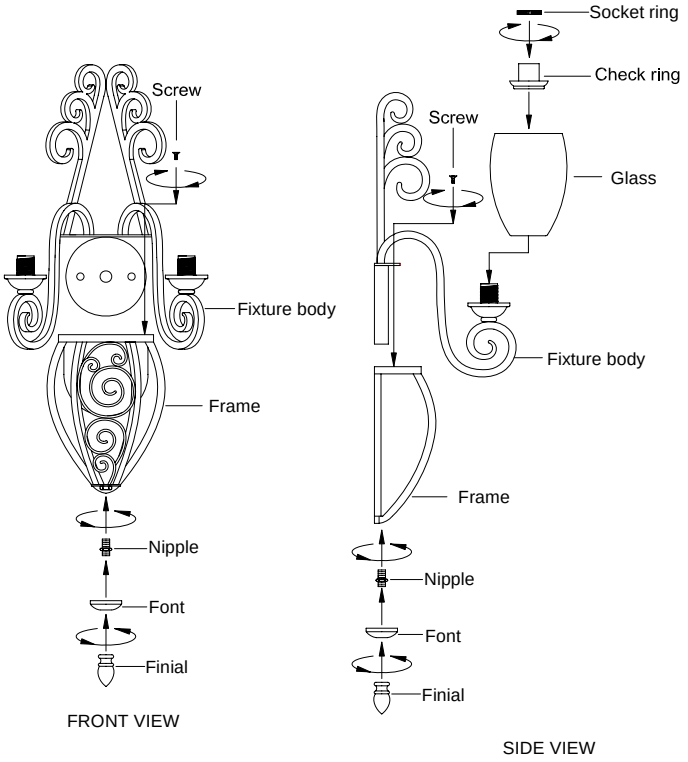

1. Before beginning assembly, carefully unpack and identify all parts referring to the illustration.
2. Turn off power to the installation point OFF. Locate the crossbar and secure to the outlet box in the wall with (2) outlet box screws.
3. Make wires connections: (We recommend 2 people for this step) Locate and attach the House ground wire to the fixture ground wire. Proceed to attach both to the crossbar with green ground screw. Use wire connectors attach the house white wire to fixture white (or ribbed side) supply wire; Connect the house black (or red) wire to the fixture black (or smooth side) wire. Wrap all connections with approved electrical tape.
4. Carefully tuck all wires into the wall mounted outlet box and position the fixture over the outlet box. Align the holes in the backplate with the (2) mounting screws attached to the crossbar. Pass the fixture over the (2) mounting screws and secure by threading the (2) ball nuts onto end of screw. Hands tighten until snug.
5. Raise frame up to fixture body aligning the holes of frame and fixture body secure with screw in the diagram.
6. Place font over the nipple at the bottom of fixture body and secure with finial.
7. Carefully place the glass over the socket and secure with check ring and socket ring as shown.
8. Install proper bulb(s) to the socket referring to the markings and labels on fixture for maximum wattage.
9. Restore power to the installation point ON. Retain this sheet for future reference.

IF IN DOUBT ABOUT ELECTRICAL INSTALLATION, CONSULT A LICENSED ELECTRICIAN!